

## Passive module - VIP-3/PT/FLK50/AN/2P/S7-1500 - 2908499

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE COMPACT LINE interface module for Siemens S7-1500 systems with S7-1500 specific labeling, with push-in connection, external power distribution connections, module width: 128.2 mm

### Your advantages

- Single 50-pin FLK header
- Three-level, screw terminal field connections
- Printed channel markings
- External power distribution connections



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 363516
GTIN	4055626363516

### Technical data

#### Dimensions

Width	128.2 mm
Height	75.8 mm
Depth	63 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Max. permissible operating voltage	25 V AC
	60 V DC
Max. perm. current (per branch)	1 A
Max. permissible current (separate power supply)	7 A

# Passive module - VIP-3/PT/FLK50/AN/2P/S7-1500 - 2908499

## Technical data

### General

Number of positions	50
Status display	No
Mounting position	any

### Connection data

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14

### Connection data 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	50
Pitch	2.54 mm

### Supported controller

Controller	SIEMENS S7-1500
- suitable I/O card	6ES7 531-7KF00-0AB0
	6ES7 531-7NF00-0AB0
	6ES7 531-7NF10-0AB0
	6ES7 531-7PF00-0AB0
	6ES7 532-5HF00-0AB0

### Standards and Regulations

Standards/regulations	IEC 60664
	DIN EN 50178
Flammability rating according to UL 94	V0


### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


## Drawings

# Passive module - VIP-3/PT/FLK50/AN/2P/S7-1500 - 2908499

Dimensional drawing

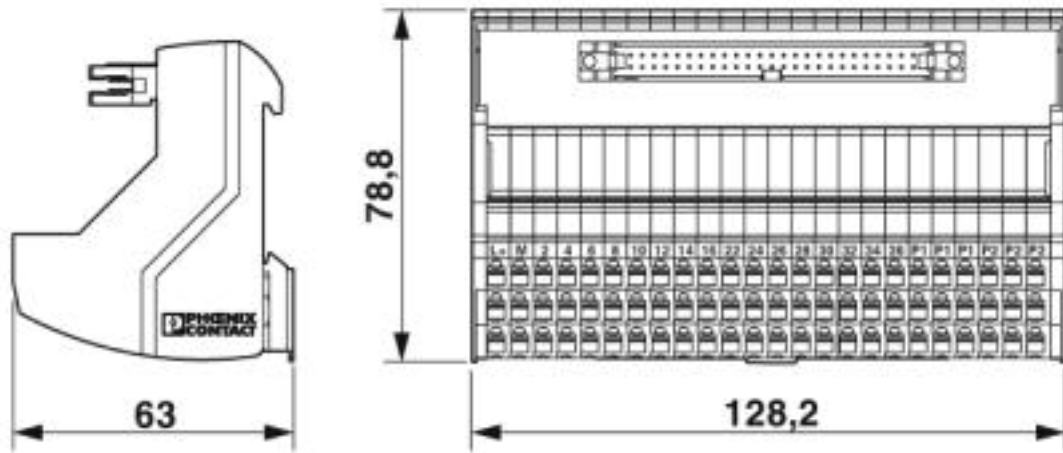

Circuit diagram

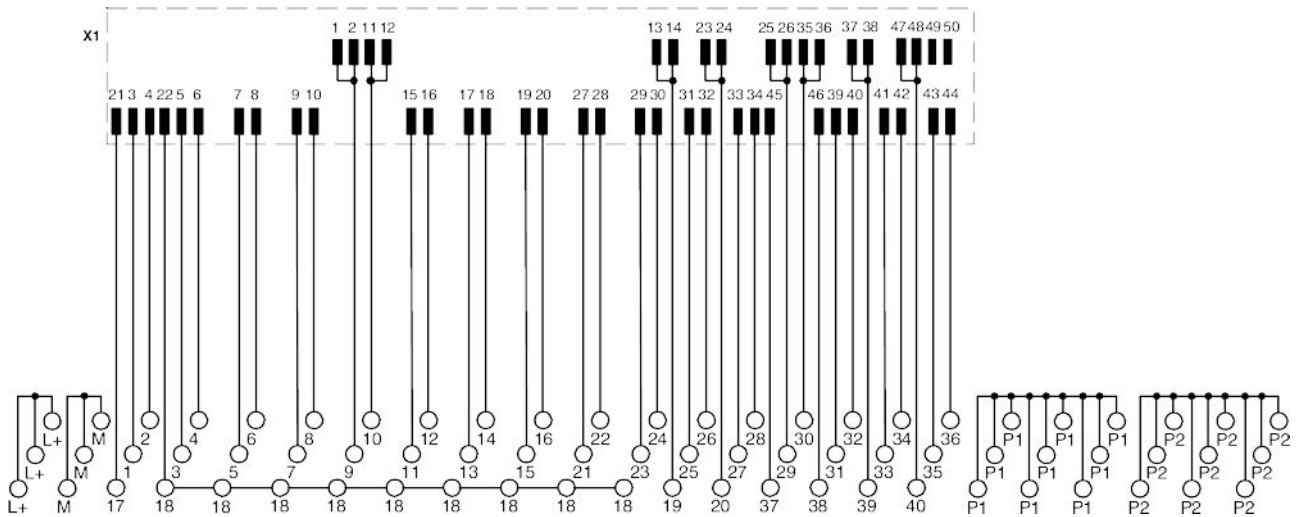

# Passive module - VIP-3/PT/FLK50/AN/2P/S7-1500 - 2908499

## Approvals


### Approvals


#### Approvals


CSA / UL Recognized / cUL Recognized / CSAus / cULus Recognized / cCSAus


#### Ex Approvals

### Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN		60 V	
Nominal current IN		7 A	
mm <sup>2</sup> /AWG/kcmil		26-14	

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		60 V	
Nominal current IN		7 A	
mm <sup>2</sup> /AWG/kcmil		26-14	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		60 V	
Nominal current IN		7 A	
mm <sup>2</sup> /AWG/kcmil		26-14	

CSAus		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN		60 V	
Nominal current IN		7 A	
mm <sup>2</sup> /AWG/kcmil		26-14	

## Passive module - VIP-3/PT/FLK50/AN/2P/S7-1500 - 2908499

### Approvals

cULus Recognized



cCSAus



Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>